


## CASTOR- Lamellenhut

Der Lamellenhut ist aufgrund seiner ansprechenden Form nicht mehr wegzudenken.

Der CASTOR- Lamellenhut wird in Form und Funktion heutigen Anforderungen in hohem Masse gerecht.

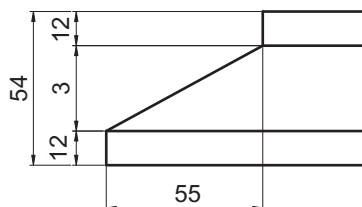

NW	Lamellen Ø aussen	Lamellen Ø innen	Anzahl Lamellen	Höhe	Stutzen
100	208	96	4	265	3
125	235	121	4	265	3
150	260	146	4	265	3
160	270	156	4	265	3
180	290	176	4	265	3
200	310	196	4	265	3
224	334	220	5	325	3
250	360	246	5	325	3
280	390	276	5	325	3
300	410	296	5	325	3
315	425	311	5	325	3
350	460	346	5	325	3
355	465	351	5	325	3
400	510	396	6	385	5
450	560	446	6	385	5
500	610	496	6	385	5
550	660	546	6	385	6
560	670	556	7	445	6
600	710	596	7	445	6
630	740	626	7	445	6
650	760	646	7	445	6
700	810	696	8	505	6
710	820	706	8	505	6
750	860	746	8	505	6
800	910	796	8	505	6
850	960	846	9	565	6
900	1010	896	9	565	8
950	1060	946	10	625	8
1000	1110	996	10	625	8



# Ohnsorg

Ohnsorg Söhne AG  
Kamin- und Ventilationshüte  
Knonauerstrasse 5  
6312 Steinhausen

Telefon 041 / 747 00 22  
Telefax 041 / 747 00 29  
www.oh-dachaustritte.ch  
sales@oh-dachaustritte.ch


Ausschreibungstext:

CASTOR- Lamellenhut aus Kupfer  
 Typ CRL NW Ø 315 mm  
 mit Standrohr 1000 mm lang  
 inkl. Schutzgitter aus Cr.Ni.Stahl  
 Fabrikat: Ohnsorg


Querschnittverhältnis Rohr/Hut

NW	Rohr- Querschnitt	Hut- Querschnitt	Faktor Rohr/Hut
100	7'854 mm <sup>2</sup>	61'889 mm <sup>2</sup>	7.88
125	12'272 mm <sup>2</sup>	77'361 mm <sup>2</sup>	6.31
150	17'671 mm <sup>2</sup>	92'865 mm <sup>2</sup>	5.26
160	20'106 mm <sup>2</sup>	99'022 mm <sup>2</sup>	4.93
180	25'447 mm <sup>2</sup>	111'400 mm <sup>2</sup>	4.38
200	31'416 mm <sup>2</sup>	123'778 mm <sup>2</sup>	3.94
224	39'408 mm <sup>2</sup>	168'891 mm <sup>2</sup>	4.29
250	49'087 mm <sup>2</sup>	188'495 mm <sup>2</sup>	3.84
280	61'575 mm <sup>2</sup>	211'114 mm <sup>2</sup>	3.43
300	70'686 mm <sup>2</sup>	226'194 mm <sup>2</sup>	3.21
315	77'931 mm <sup>2</sup>	237'504 mm <sup>2</sup>	3.05
350	96'211 mm <sup>2</sup>	263'760 mm <sup>2</sup>	2.74
355	98'980 mm <sup>2</sup>	267'663 mm <sup>2</sup>	2.71
400	125'664 mm <sup>2</sup>	355'628 mm <sup>2</sup>	2.83
450	159'043 mm <sup>2</sup>	400'081 mm <sup>2</sup>	2.52
500	196'350 mm <sup>2</sup>	444'535 mm <sup>2</sup>	2.26
550	237'583 mm <sup>2</sup>	488'988 mm <sup>2</sup>	2.06
560	246'301 mm <sup>2</sup>	573'528 mm <sup>2</sup>	2.33
600	282'743 mm <sup>2</sup>	614'494 mm <sup>2</sup>	2.17
630	311'725 mm <sup>2</sup>	645'219 mm <sup>2</sup>	2.07
650	331'831 mm <sup>2</sup>	665'702 mm <sup>2</sup>	2.01
700	384'845 mm <sup>2</sup>	811'472 mm <sup>2</sup>	2.11
710	395'919 mm <sup>2</sup>	823'065 mm <sup>2</sup>	2.08
750	441'786 mm <sup>2</sup>	869'434 mm <sup>2</sup>	1.97
800	477'836 mm <sup>2</sup>	927'396 mm <sup>2</sup>	1.94
850	567'450 mm <sup>2</sup>	1'100'184 mm <sup>2</sup>	1.94
900	636'173 mm <sup>2</sup>	1'164'901 mm <sup>2</sup>	1.83
950	708'822 mm <sup>2</sup>	1'357'952 mm <sup>2</sup>	1.92
1000	785'398 mm <sup>2</sup>	1'429'423 mm <sup>2</sup>	1.82


Varianten:




Typ CRL



Typ CT 500



Typ CRLD



Typ CRLD-S



**Ohnsorg**

Ohnsorg Söhne AG  
 Kamin- und Ventilationshüte  
 Knonauerstrasse 5  
 6312 Steinhausen

Telefon 041 / 747 00 22  
 Telefax 041 / 747 00 29  
 www.oh-dachaustritte.ch  
 sales@oh-dachaustritte.ch